
## Electrochemistry Laboratory




# Radiation grafted polymer electrolyte membranes for water electrolysis cells Characterization of key membrane properties

## Albert Albert, Thomas J. Schmidt, Lorenz Gubler

Electrochemistry Laboratory, Paul Scherrer Institut, 5232 Villigen PSI, Switzerland albert.albert@psi.ch

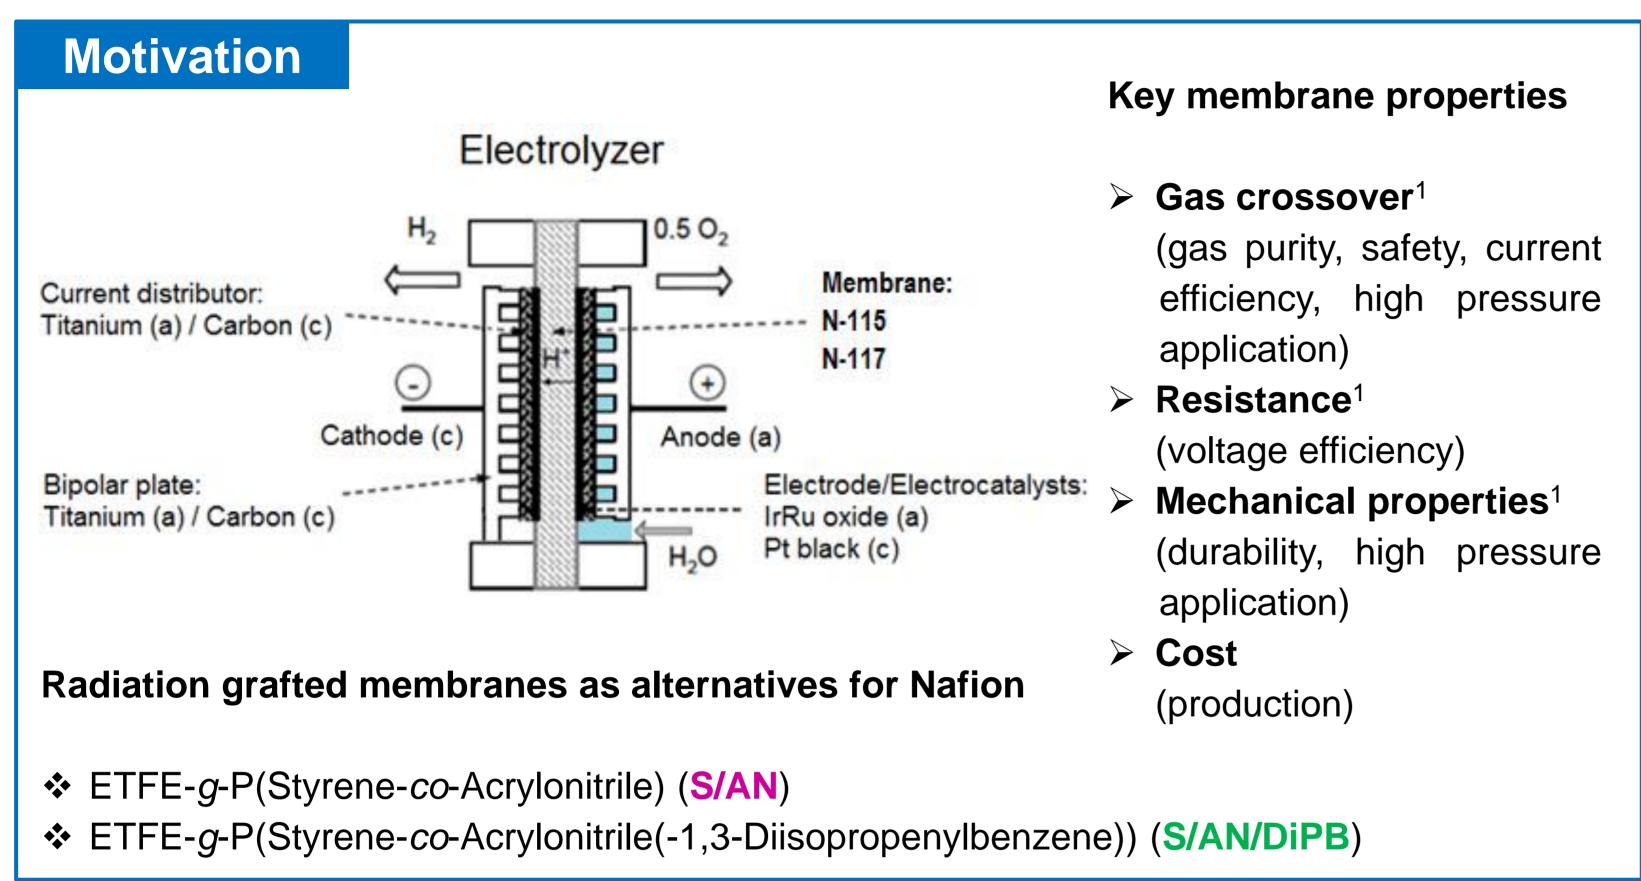


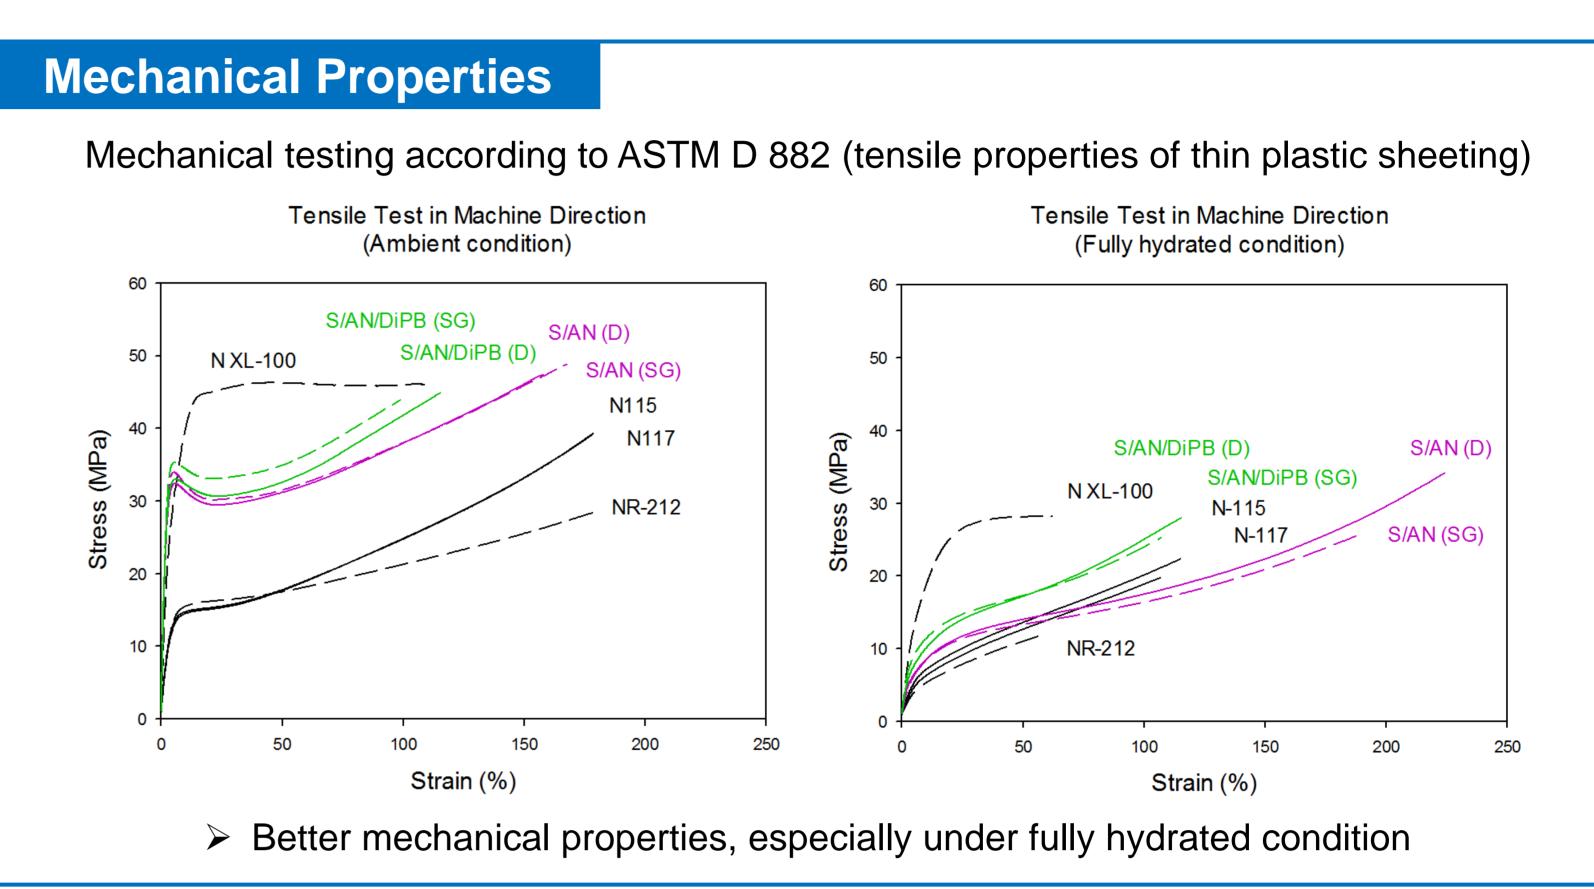



M: Figure of merit (MPa/V)

Better


Ambient condition

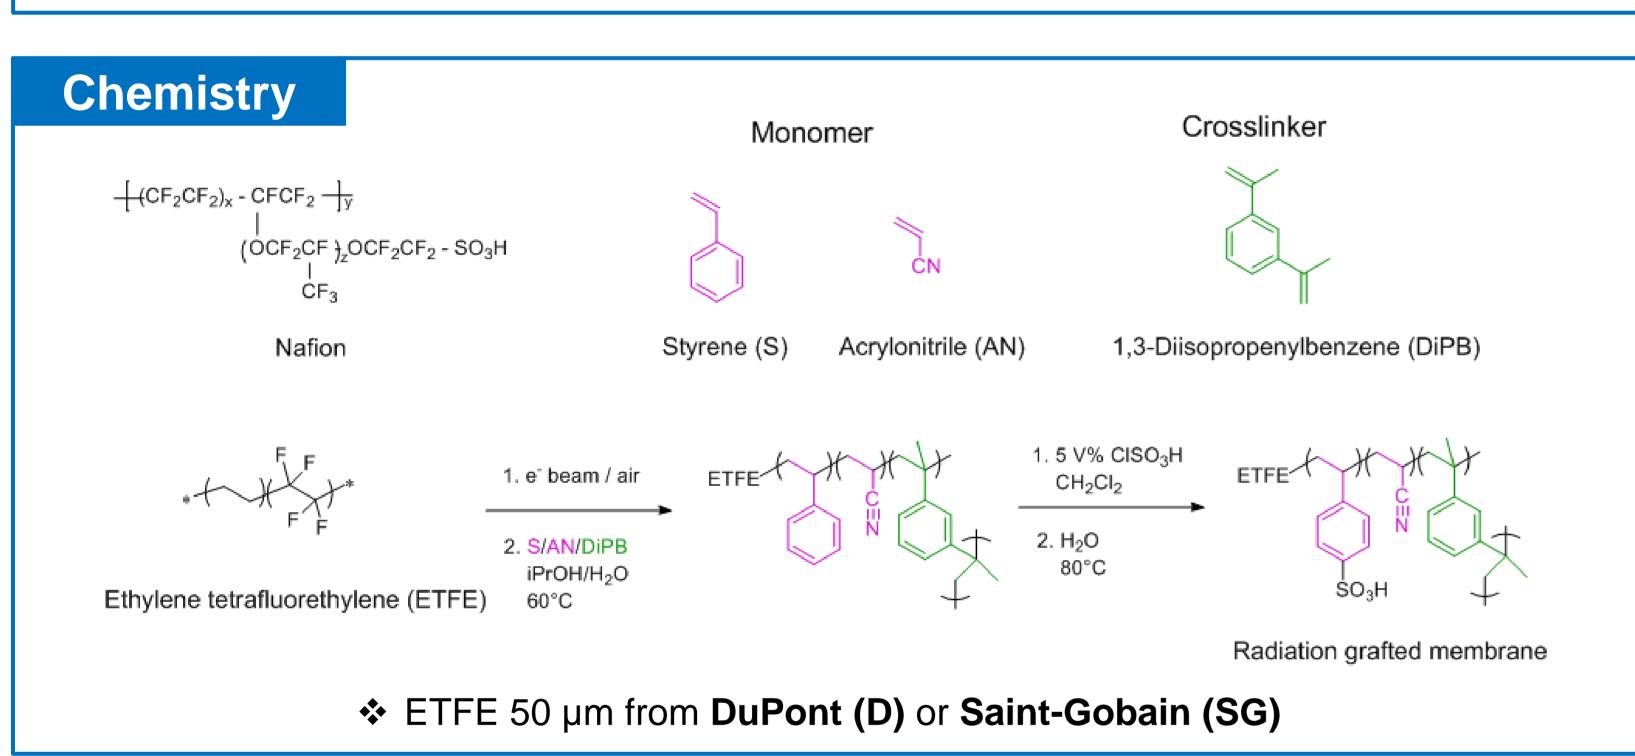


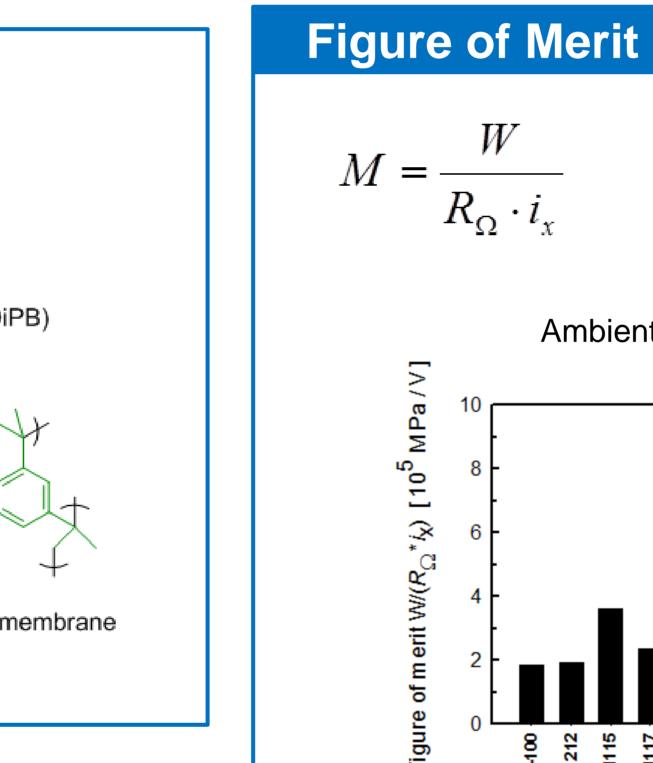

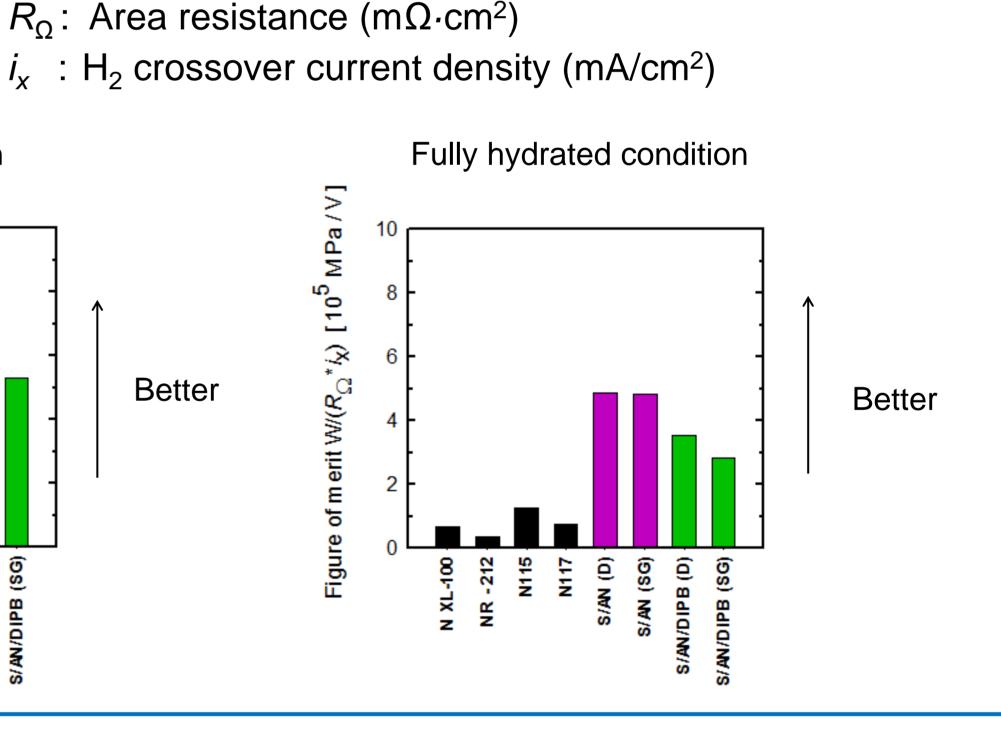

W: Toughness (area under the stress-strain curve) (MPa)

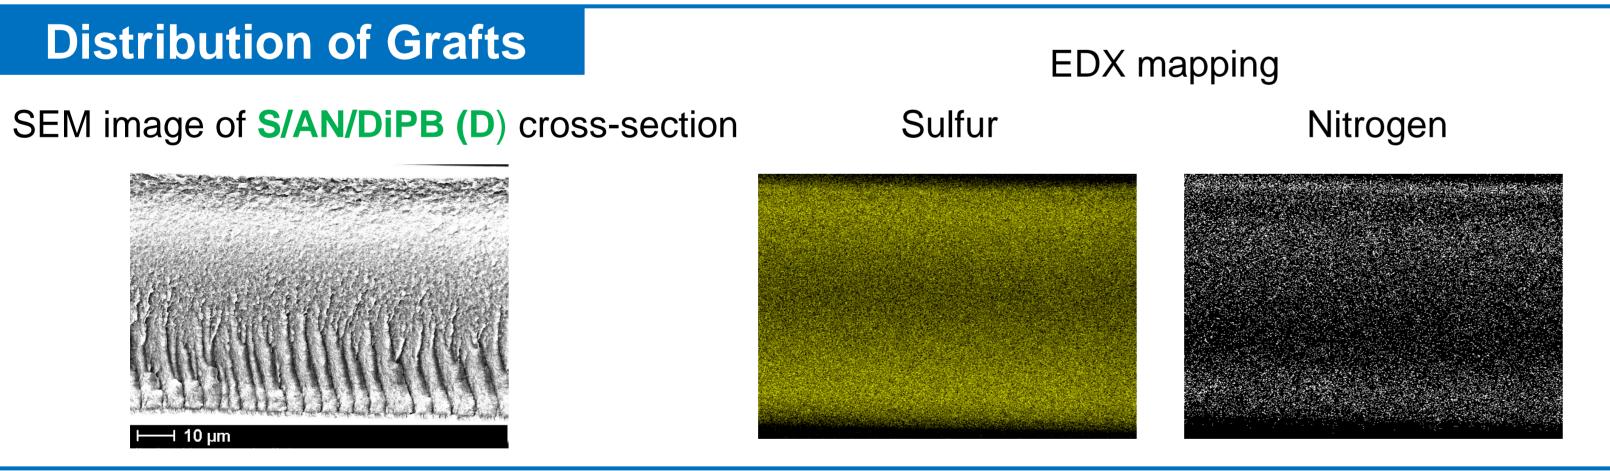


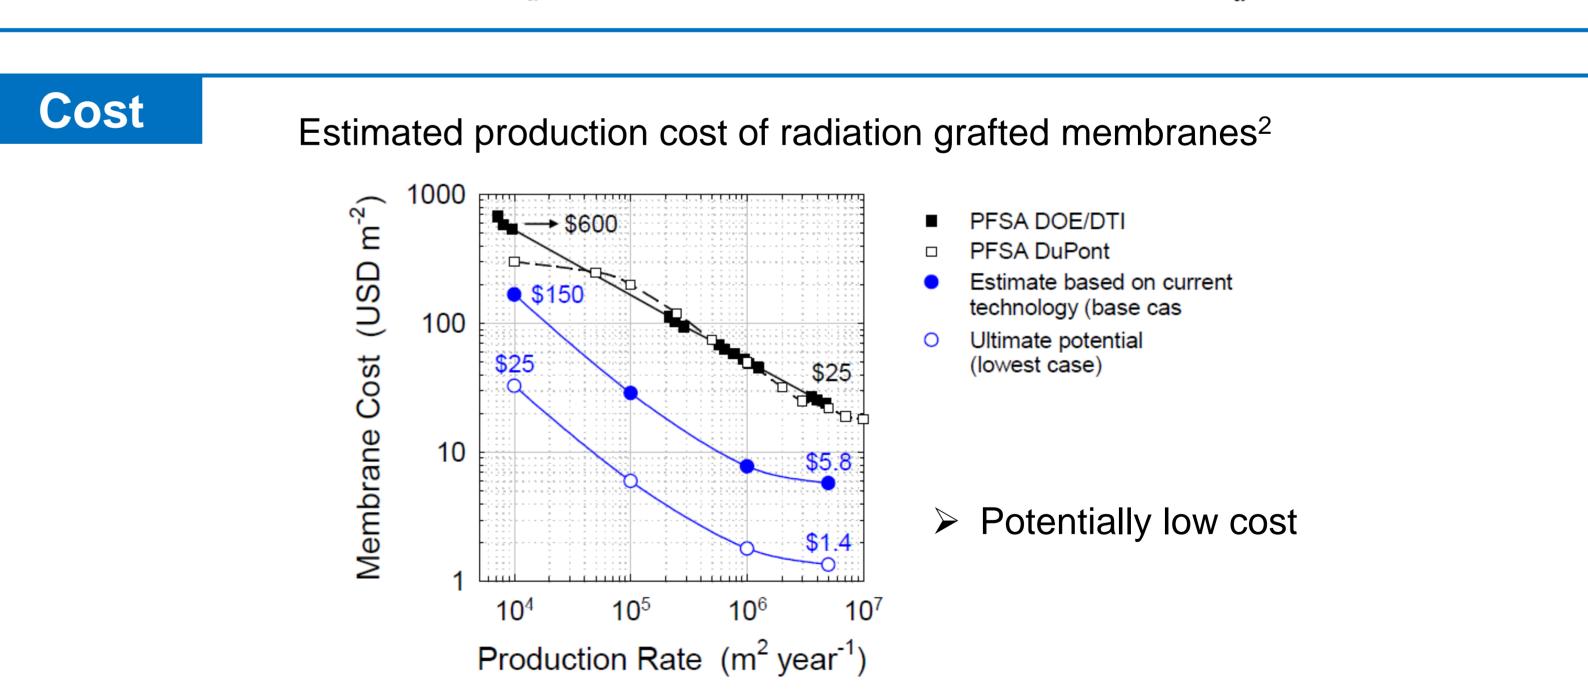

#### **Property Map**

Gas crossover (H<sub>2</sub> crossover experiments; fuel cell; H<sub>2</sub>/N<sub>2</sub>; 80 °C; 2.5/2.5 bar<sub>a</sub>; RH 100%)

Area resistance (high frequency resistance @ 0.2 A/cm<sup>2</sup>; fuel cell; H<sub>2</sub>/O<sub>2</sub>; 80 °C; 2.5/2.5 bar<sub>a</sub>; RH 100%)

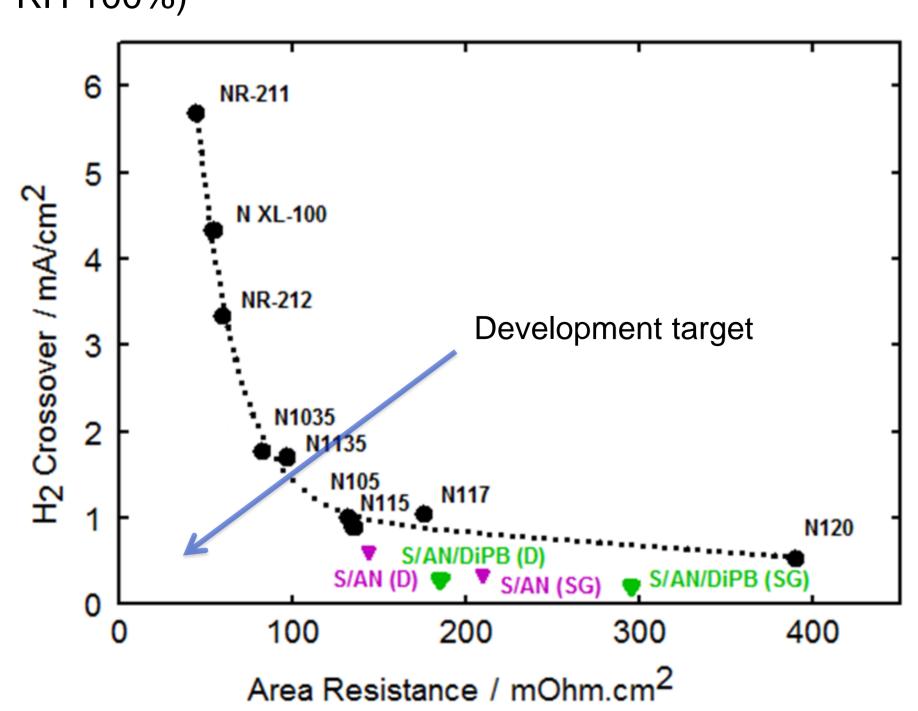

### Radiation grafted membrane N115 / N117

- Lower gas crossover
- Similar resistance

### Conclusion

- Lower gas crossover
- Better mechanical properties

Similar resistance

Potentially lowc ost

The radiation grafted membranes are promising alternatives to Nafion for water electrolyzer applications.

#### Acknowledgement

The research leading to these results has received funding from the European Union's Seventh Framework Programme (FP7/2007-2013) for the Fuel Cells and Hydrogen Joint Technology Initiative under grant agreement no303484 (NOVEL project).